

High Performance Laser Diode Series

Violet in TO-5.6 CAN Package

KLC433FS01WW

Overview

Nuvoton Technology Corporation Japan provides a series of violet laser diode. The laser diode which emits 402nm laser light, is assembled in a conventional TO-5.6 CAN package. Unique compound semiconductor process technology and low optical loss structure can realize high output power and high reliability lasers which are suitable for industrial use.

Features

- Wavelength: 402 nm (typ.)
- High Output Power, Multiple Transverse Mode
- Emitter Size: 14um x 1um
- Extended Operating Temperature (0 to +50 degrees C)
- Conventional TO-5.6 Package , 3pin

Applications

- Laser Direct Imaging
- Material Processing
- Analysis, Measurement
- Display
- Other Industrial Use

Absolute Maximum Ratings


Item	Symbol	Value	Unit	Condition
Output power	Po	1.4	W	CW
Operating case temperature	Tc	0 to +50	°C	CW
Storage temperature	Tstg	-40 to +85	°C	-

Electrical and Optical Characteristics

Tc=25°C, CW

Item	Symbol	Min.	Typ.	Max.	Unit	Condition	
Threshold current	Ith	-	130	200	mA	-	
Operating current	Iop	600	720	800	mA	1.2W	
Operating voltage	Vop	-	4.4	5.2	V	1.2W	
Wavelength	λ	395	402	405	nm	1.2W	
Beam divergence	Parallel ¹⁾	θ_h	8	12	20	deg	1.2W
	Perpendicular ¹⁾	θ_v	40	44	48	deg	1.2W

Note) 1) Full width at 1/e² of the peak intensity.

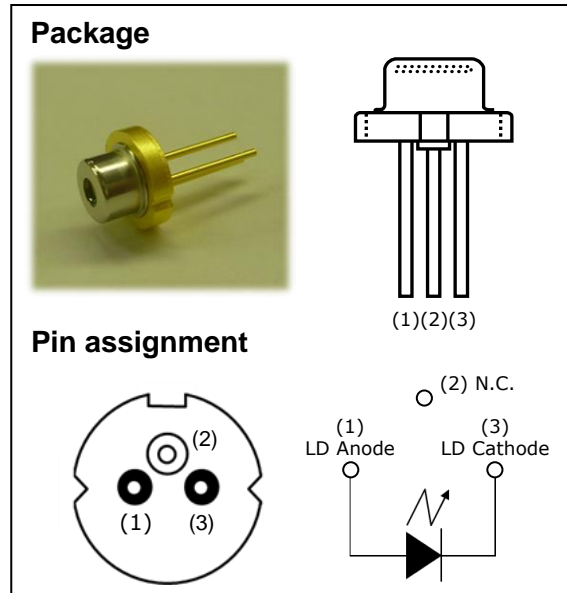

The products and product specifications described in this document are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.